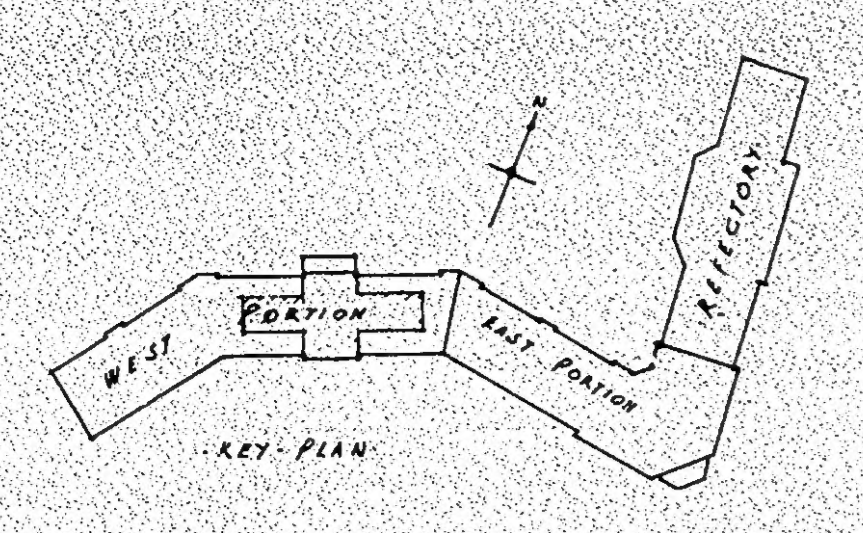
WEST PORTION
EAST PORTION
KEY PLAN

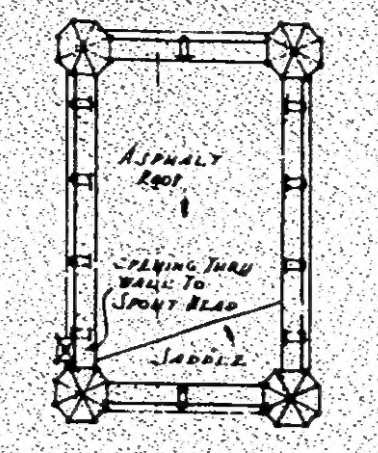

PLAN OF TOWER ROOF

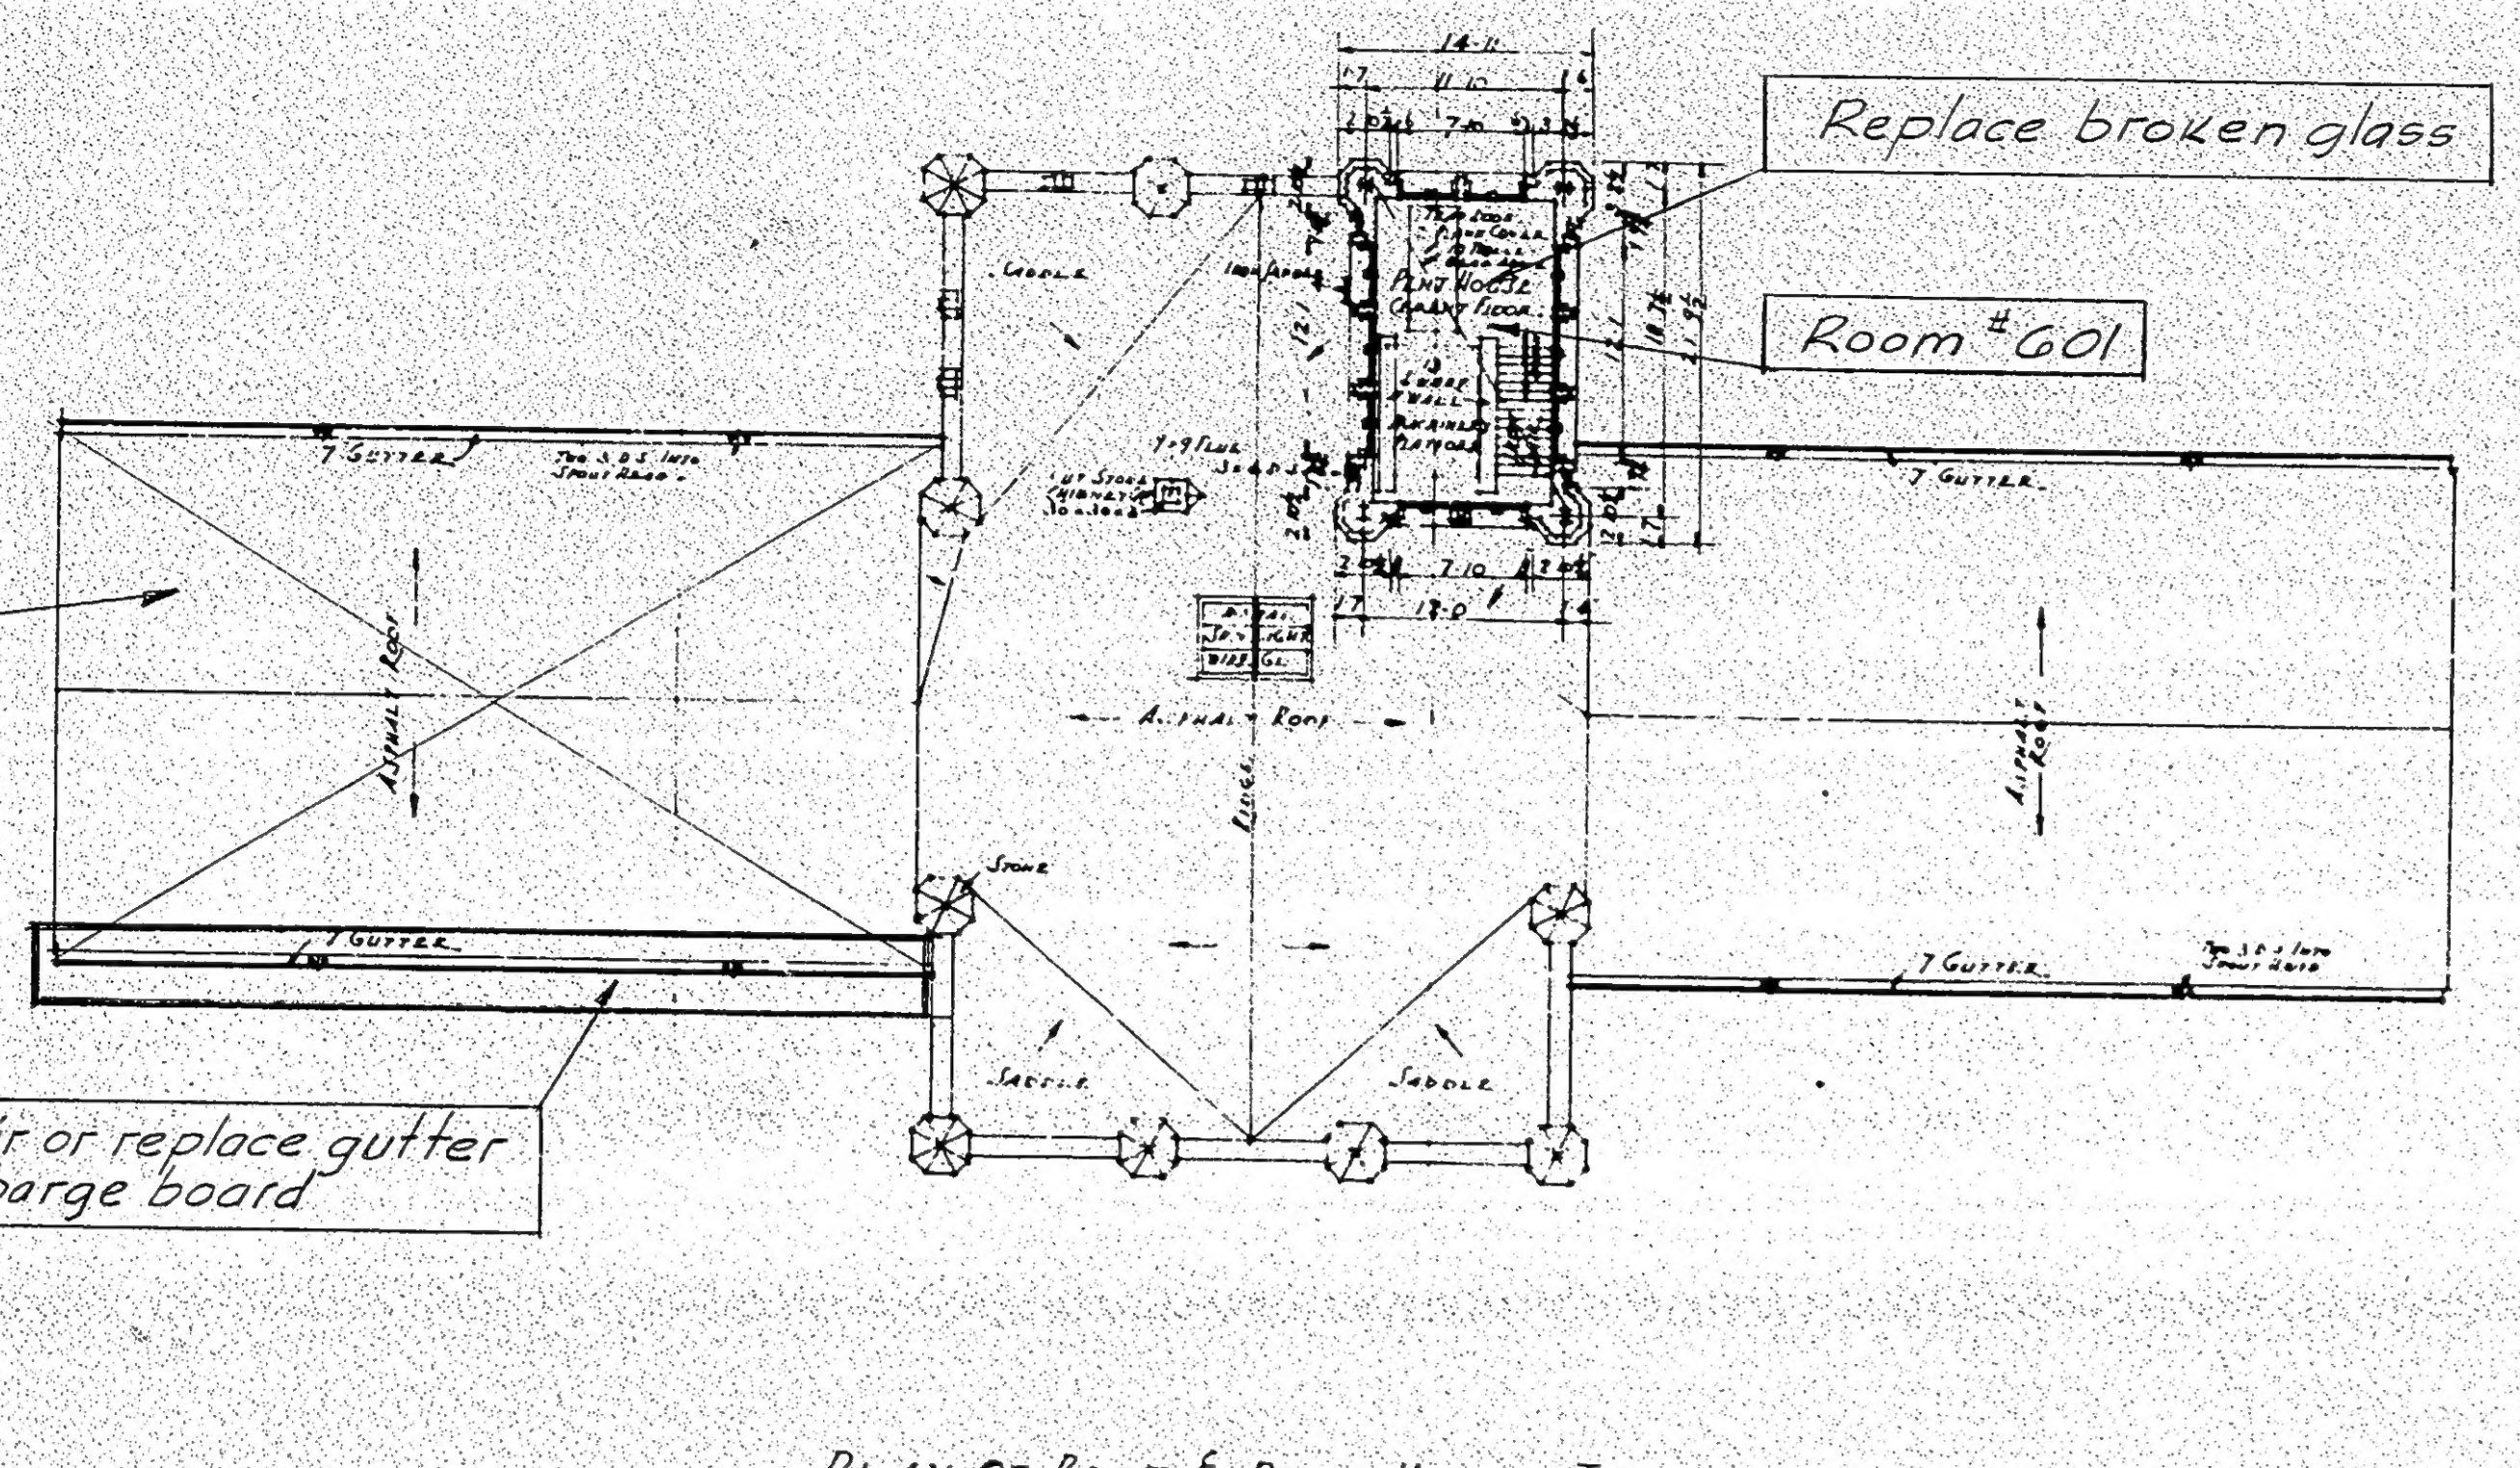
Replace broken glass
Room # 601
Patch roof to stop leaks
Repair or replace gutter and barge board

PLAN OF ROOF & PENT HOUSE TOWER ON WEST PORTION

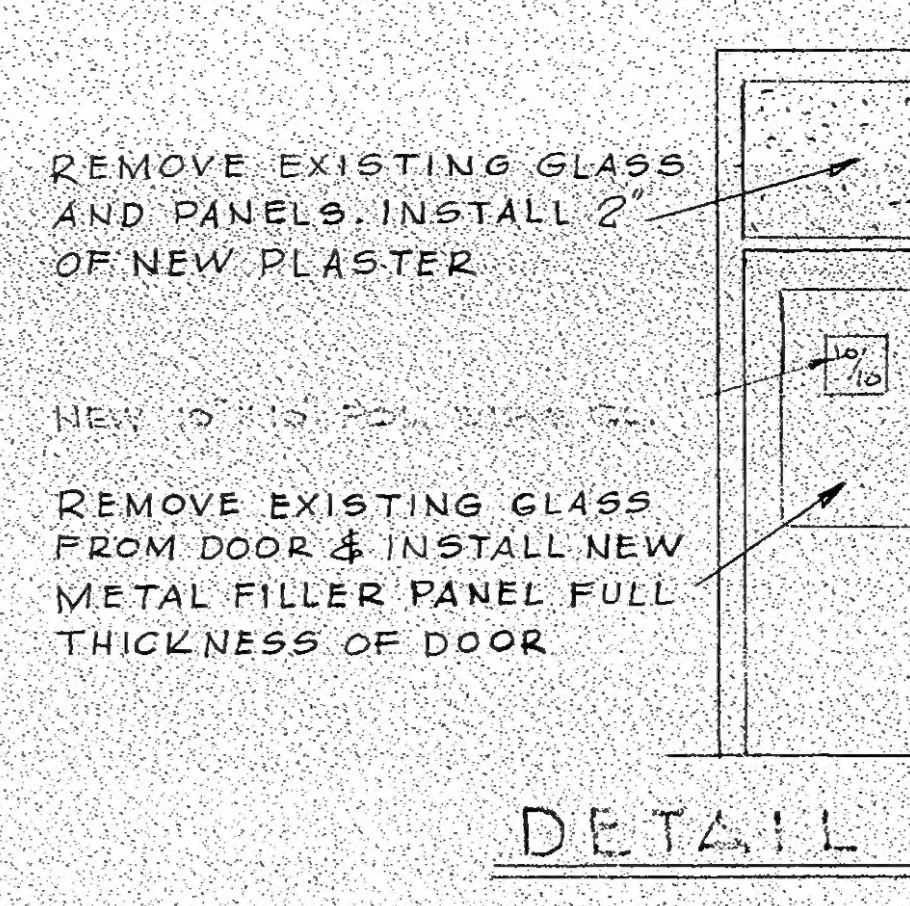
REMOVE EXISTING GLASS AND PANELS. INSTALL 2" OF NEW PLASTER
NEW 10"X10" POL. WIRE GL.
REMOVE EXISTING GLASS FROM DOOR & INSTALL NEW METAL FILLER PANEL FULL THICKNESS OF DOOR

DETAIL NO. 2

FIRST FLOOR - CORR. TO STAIR HALLS NO. 1-A
SECOND FLOOR CORR. TO STAIRHALLS NO. 2-A & 2-B
THIRD FLOOR CORR. TO STAIR HALLS NO. 3-A & 3-B
FOURTH FLOOR CORR. TO STAIR HALLS NO. 4-A & 4-B
FIFTH FLOOR CORR. TO STAIR HALLS NO. 5-B

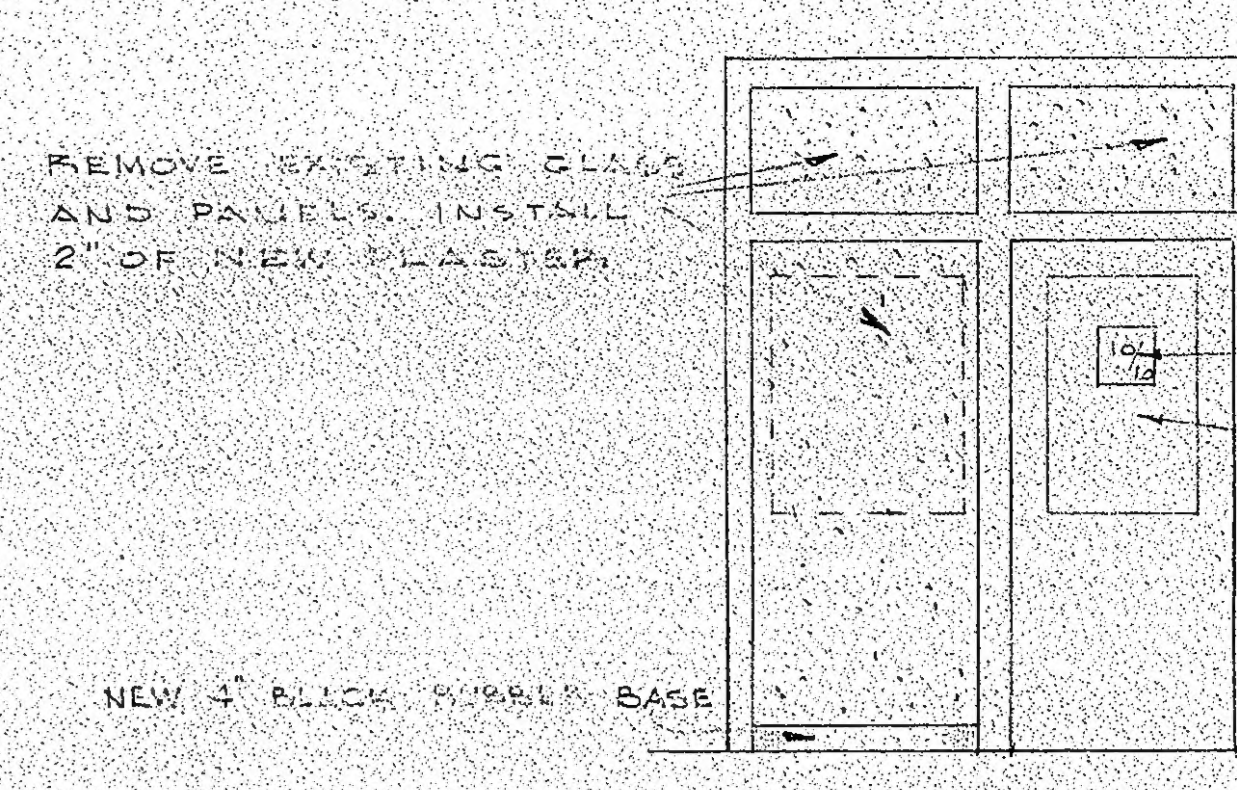
REMOVE EXISTING GLASS AND PANELS. INSTALL 2" OF NEW PLASTER
NEW 4" BLACK RUBBER BASE

DETAIL # 4

FIRST FLOOR - CORR. TO STAIR HALL # 1-C
SECOND FLOOR - CORR. TO STAIR HALL # 2-C
THIRD FLOOR — CORR. TO STAIR HALL # 3-C
FOURTH FLOOR - CORR. TO STAIR HALL # 4-C

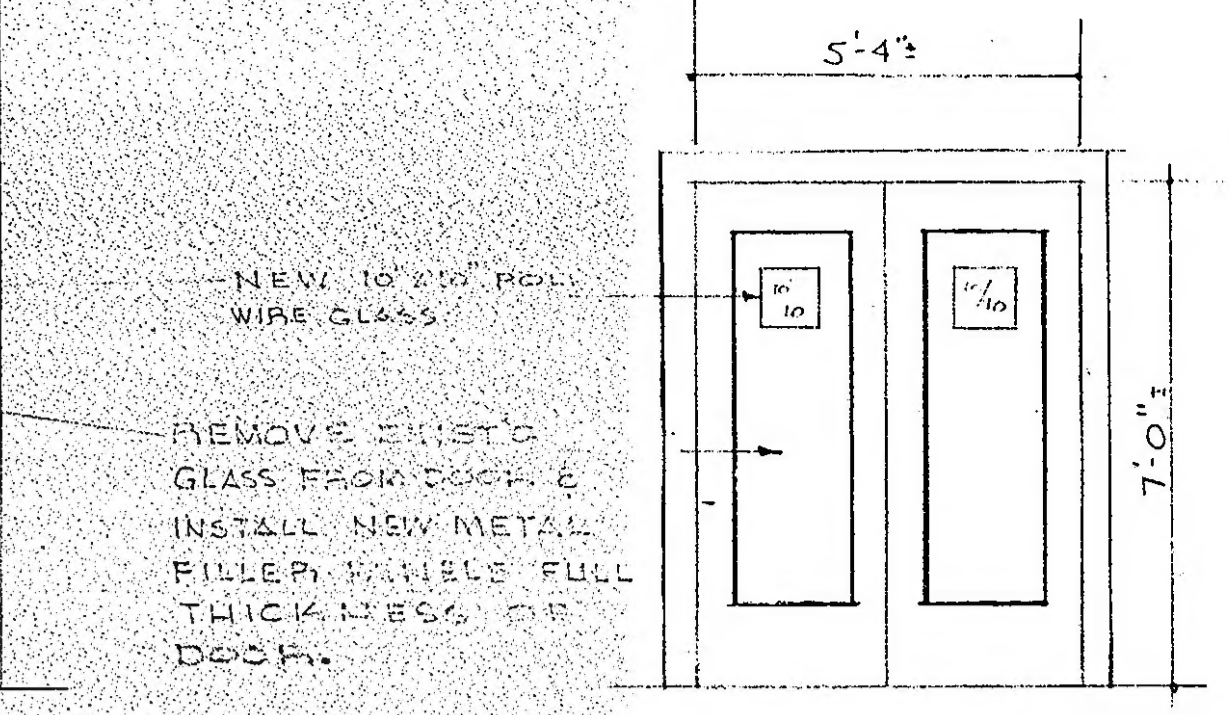
5'-4"
7'-0"
NEW 10"X10" POL. WIRE GLASS
REMOVE EXIST'G GLASS FROM DOOR & INSTALL NEW METAL FILLER PANELS FULL THICKNESS OF DOOR.

DETAIL 1-A

LOBBY TO STAIR HALL NO. 1-B

DETAILS OF DOORS FROM CORRIDORS TO STAIR HALLS

SCALE 1/4" = 1'-0"

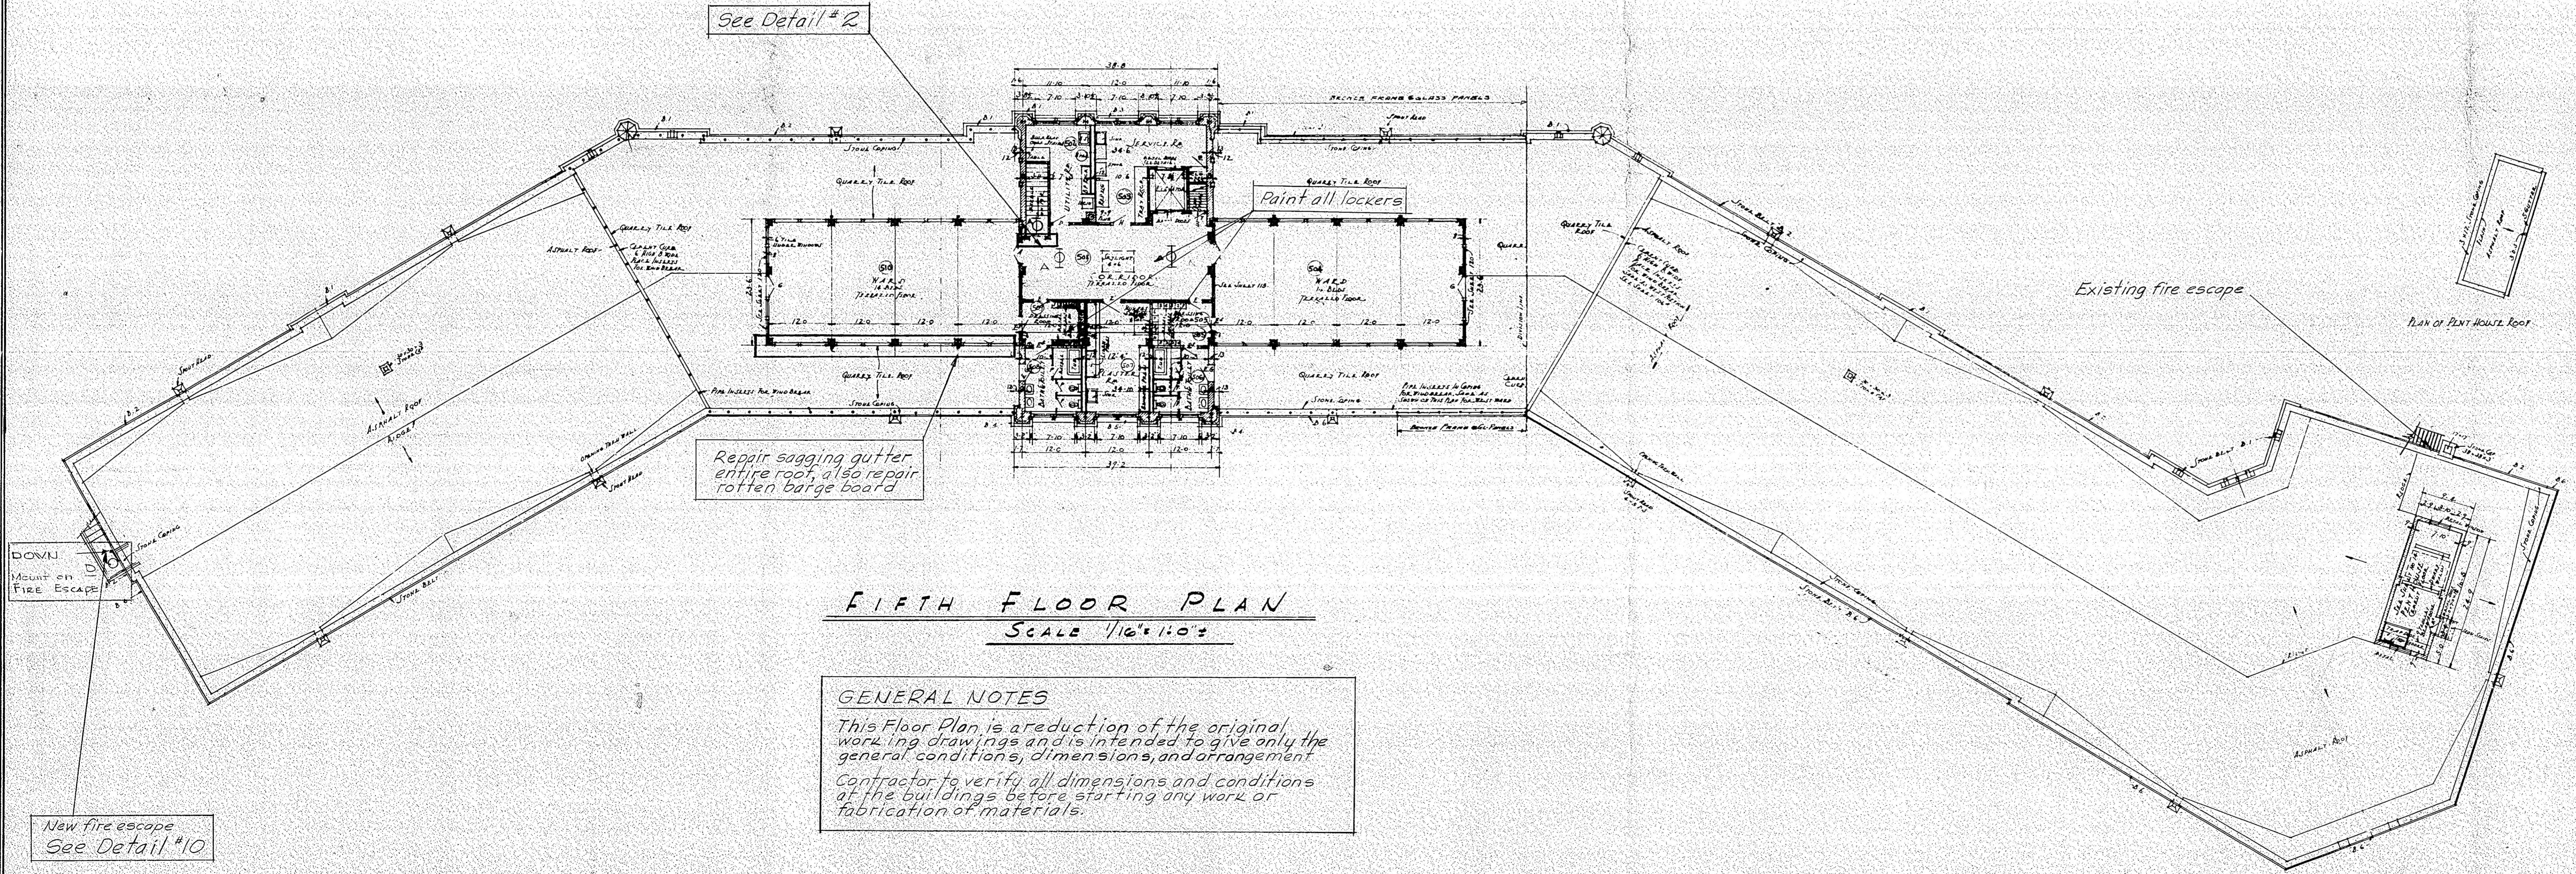
See Detail # 2
Paint all lockers
Repair sagging gutter entire roof, also repair rotten barge board
Existing fire escape
PLAN OF PENT HOUSE ROOF
DOWN
Mount on Fire Escape
New fire escape See Detail # 10

FIFTH FLOOR PLAN

SCALE 1/16" = 1'-0"

GENERAL NOTES

This Floor Plan is a reduction of the original working drawings and is intended to give only the general conditions, dimensions, and arrangement.

Contractor to verify all dimensions and conditions at the buildings before starting any work or fabrication of materials.

APPROVED BY C. Leslie Dawson DATE 9-11-62
EXECUTIVE ASSISTANT
COMMISSIONER OF FINANCE

APPROVED BY DATE 9-13-62
CHIEF OF ENGINEER'S STAFF

WAVERLY HILLS SENIOR CITIZENS CENTER
U.S. 31 W. JEFFERSON COUNTY, KY.
FOR
DEPARTMENT OF FINANCE
COMMONWEALTH OF KENTUCKY

MADE BY	SCALE		DATE
J.H. R.W.L.	AS SHOWN	MAIN HOSPITAL BUILDING FIFTH FLOOR PLAN	9-7-62

T.D. LUCKETT · J.D. FARLEY
NOS. 125-551

LUCKETT & FARLEY
INCORPORATED
ARCHITECTS
9th FLOOR · WASHINGTON BLDG.
LOUISVILLE 2, KENTUCKY
E. R. RONALD & ASSOCIATES
CONSULTING ENGINEERS

REVISIONS

SHEET NO.
5

DD-269